

# 14GP Heavy Duty Pipe Top Gooseneck Lowboy

<b>G.V.W.R.</b>	14,000#	<b>Axle</b>	(2) 7,000#, EZ Lube w/Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	7,000#	<b>Supension</b>	Multi-Leaf Slipper Spring w/Equalizer
<b>Coupler</b>	2-5/16" Ball Adjustable Pipe	<b>Tire</b>	ST235/80 R-16 Load Range E
<b>Safety Chains</b>	3/8" Grd. 70 w/Safety Latch Hook (2 ea)	<b>Wheel</b>	16" x 6"; Heavy White Mod 8 Bolt
<b>Jack</b>	12,000# Drop Leg Jack- Side Wind	<b>Floor</b>	2" Treated Pine or Douglas Fir*
<b>Neck</b>	10" I-Beam	<b>Lights</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>Top Rail</b>	3" Square Tubing	<b>Elec. Plug</b>	7-Way RV
<b>Frame</b>	5" x 3" x 5/16" Angle	<b>Finish (Prep)</b>	Steel is Cleaned to Ensure a Professional Smooth Finish.
<b>Crossmembers</b>	3" Channel on 16" Centers	<b>Finish</b>	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
<b>Uprights</b>	15" Tall, 3" x 2" x 3/16" Angle		
<b>Fenders</b>	9" x 72" Double Broke Diamond Plate w/ Back		


\* Douglas Fir Available from Caldwell, ID Facility Only

## Standard Features

- Gooseneck with 2-5/16" Adjustable Pipe Coupler
- 12,000# Drop Leg Jack - Sidwind
- (4) Tie Down Pockets on Outside Frame
- EZ Lube Hubs
- Dexter Brand Axles
- Nev-R-Adjust Electric Brakes on All Hubs
- Cambered Axles
- Heavy Duty 3" Square Tube Top Rail
- Double Broke Diamond Plate Fenders
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Spare Tire Mount (Top of Neck)
- 4' Slide-In Ramps (Channel)
- Complete Break-A-Way System w/Charger
- Radial Tires

## Description

Dimensions			
Length	A	B	C
20'	240"	160"	80"
24'	288"	192"	96"

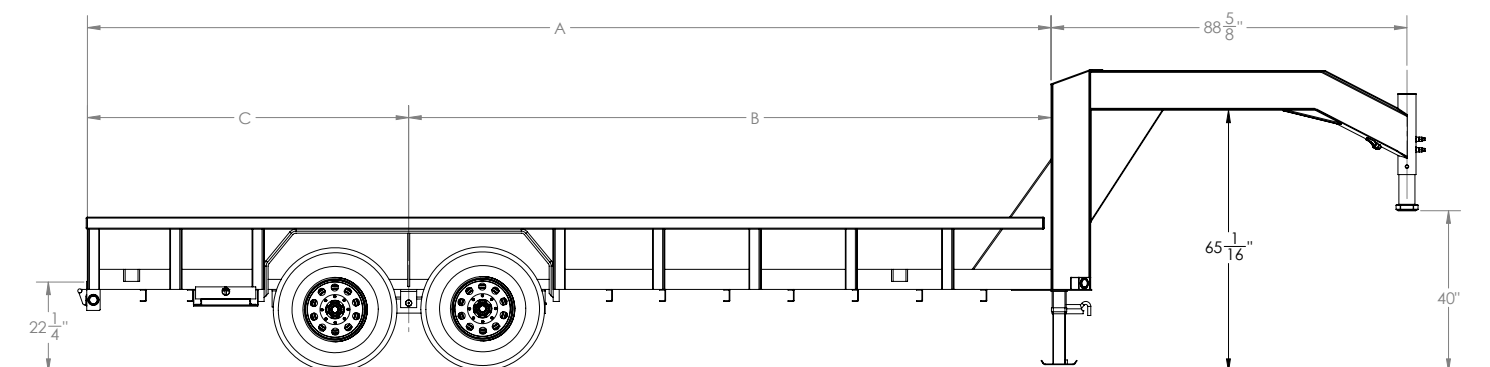

# 14GP Heavy Duty Pipe Top Gooseneck Lowboy ●



Model	Weight*	Description
14GP-20	3,450#	83" x 20' HD Gooseneck Tandem Axle Pipe Top Lowboy
14GP-24	3,850#	83" x 24' HD Gooseneck Tandem Axle Pipe Top Lowboy

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

Category	Description
BRAKES	Electric Over Hydraulic Brakes (Drum)
JACKS	Dual 12,000# Drop Leg Jacks
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-E)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G)
RAMPS	5' Stand up Ramps in Lieu of Slide In
RAMPS	4' Heavy Duty Integrated Ramp Gate w/Gas Shock Assist in Lieu of Ramps
RAMPS	5' Heavy Duty Integrated Ramp Gate w/Gas Shock Assist in Lieu of Ramps (Split Gate)
BODY	Enclose Sides w/ Expanded Metal (Per Square Foot)
BODY	Enclose Sides w/ Sheet Metal (Per Square Foot)
BODY	2' High Sides (Open)
BODY	3' High Sides (Open)
BODY	4' High Sides (Open)
BODY	1/8" Diamond Plate Steel Floor (Per Square Foot)
CARGO CONTROL	Lockable Tool Box Between Gooseneck Risers (Dual Jacks Required)
CARGO CONTROL	Additional Tie Down Pockets (Each)
CARGO CONTROL	B40 5/8" D-Ring (Each)