

22GN-HDT Tandem Dual Wheel Gooseneck w/ Hydraulic Dovetail

G.V.W.R.	23,900#	Axle	(2) 10,000# Dual Wheel w/ Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle)	10,000#	Suspension	Heavy Duty 30,000# Adjustable
Coupler	2-5/16" Ball Adj. Square Crank Type	Tire	ST235/80 R-16 Load Range E Dual
Safety Chains	3/8" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	16" x 6"; Dual Wheel 8 Bolt
Jack	Dual 12,000# Drop Leg Jacks (Bolted On)	Floor	2" Treated Pine or Douglas Fir*
Neck	12" I-Beam, 16#	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Top Rail	None	Elec. Plug	7-Way RV
Frame	12" I-Beam, 16#	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Crossmembers	3" Channel	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
Side Rail	6" Channel w/Rub Rail, Tie Down Pockets on 24" Centers, and Chain Spools		


* Douglas Fir Available from Caldwell, ID Facility Only

Standard Features

- 9' Hydraulic Dovetail
- Diamond Plate Knife Edge on Rear
- Cleated Dovetail w/ Wood Between Runners
- Collapsible Rear Bumper
- Innovative Sled-Design Locking/Lifting System
- Lockable Side Mount Tool Box Housing Power Unit
- 2-5/16" Ball Adjustable Coupler- Square Crank Type
- Dual 12,000# Drop Leg Jacks (Bolted on) w/Greasable Handle
- 102" Overall Width
- Low Profile Bed, Pierced- Beam Frame
- Lockable Toolbox Between GN Uprights
- (2) Side Bed Steps & Handles
- 3/8" Heavy Duty Rub Rail
- Tie Down Pockets Along Sides, 24" On Center
- 1-1/4" Pipe Chain Spools Between Tie Down Pockets
- Dexter Brand Axles
- Oil Bath Hubs
- Forward Self Adjusting Brakes
- Heavy Duty 30,000# Adjustable Suspension by Dexter Axle
- Torque Tube- Standard Equipped
- Cambered Axles
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Modular Sealed Wiring Harness
- Spare Tire Mount (Top of Neck)
- Complete Break-A-Way System w/Charger
- Radial Tires
- Spare Tire & Wheel- Standard Equipped **NEW!**
- Dovetail Lifting Capacity Approx. 8,000#
- Dovetail Carrying Capacity Approx. 4,000# (From Middle of Dovetail, Forward)

Description

Dimensions			
Length	A	B	C
35	420"	259"	161"
40	480"	319"	161"

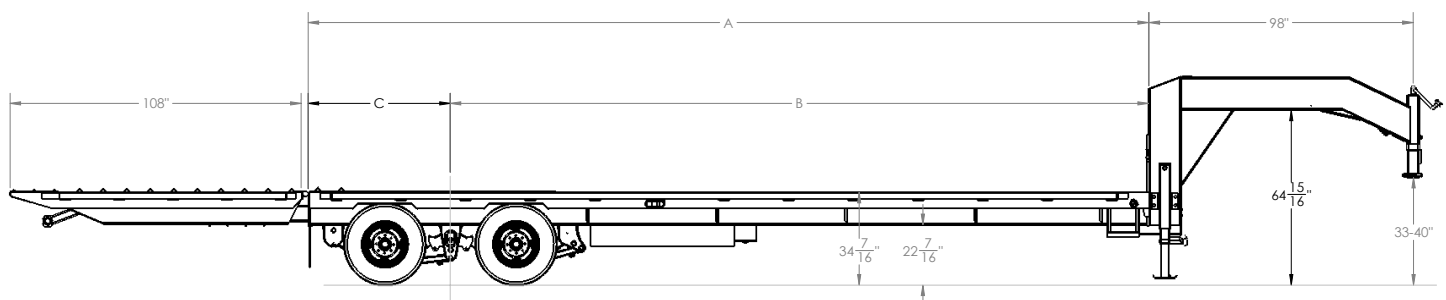

22GN-HDT Tandem Dual Wheel Gooseneck w/ Hydraulic Dovetail



Model	Weight*	Description
22GN-35-HDTS	7,950#	102" x 35' (26' + 9') TD Gooseneck w/ Hydraulic Dovetail
22GN-40-HDTS	8,800#	102" x 40' (31' + 9') TD Gooseneck w/ Hydraulic Dovetail

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
JACKS	Dual 2-Speed Landing Gear
JACKS	Dual Electric Over Hydraulic Jacks
BRAKES	Electric Over Hydraulic Brakes (Drums)
BRAKES	Electric Over Hydraulic Brakes (Disc)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G Dual)
POWER	Wireless Remote for Power Unit
POWER	5 Watt Solar Charger
BODY	Removable Deck on the Neck- Bolt On (8' W x 6' L)
CARGO CONTROL	Low Profile Tool Box 12" x 18" x 36" (Side Mount)
CARGO CONTROL	Sliding Winch Track (Per 6' Section)
CARGO CONTROL	4" Sliding Winch (Each)
CARGO CONTROL	4" Weld-On Winch (Each)
CARGO CONTROL	4" x 30' Strap (Each)
CARGO CONTROL	B 40 5/8" D-Ring (Each)