

G.V.W.R.	23,900#	Axle	(2) 10,000# Dual Wheel w/ Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle)	10,000#	Suspension	Heavy Duty 30,000# Adjustable
Coupler	2-5/16" Ball Adj. Square Crank Type	Tire	ST235/80 R-16 Load Range E Dual
Safety Chains	3/8" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	16" x 6"; Dual Wheel 8 Bolt
Jack	Dual 12,000# Drop Leg Jacks (Bolted On)	Floor	2" Treated Pine or Douglas Fir*
Neck	12" I-Beam, 16#	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Top Rail	None	Elec. Plug	7-Way RV
Frame	12" I-Beam, 16#	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Crossmembers	3" Channel		
Side Rail	6" Channel w/Rub Rail, Tie Down Pockets on 24" Centers, and Chain Spools	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.


* Douglas Fir Available from Caldwell, ID Facility Only

Standard Features

- 2-5/16" Ball Adjustable Coupler- Square Crank Type
- Dual 12,000# Drop Leg Jacks (Bolted on) w/Greasable Handle
- 102" Overall Width
- Low Profile Bed, Pierced- Beam Frame
- Lockable Toolbox Between GN Uprights
- (2) Side Bed Steps & Handles
- 3/8" Heavy Duty Rub Rail
- Tie Down Pockets Along Sides, 24" On Center
- 1-1/4" Pipe Chain Spools Between Tie Down Pockets
- Dexter Brand Axles
- Oil Bath Hubs
- Forward Self Adjusting Brakes
- Heavy Duty 30,000# Adjustable Suspension by Dexter Axle
- Torque Tube Standard on 28' (Flat Deck) & Longer
- Cambered Axles
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Modular Sealed Wiring Harness
- Spare Tire Mount (Top of Neck)
- 5' Dovetail w/ 5' Double Hinged Spring Assist Flip-Over Ramps
- Complete Break-A-Way System w/Charger
- Radial Tires
- Mudflaps
- Spare Tire & Wheel- Standard Equipped **NEW!**

Description

Dimensions			
Length	A	B	C
20 + 5	240"	186"	54"
25 + 5	300"	240"	60"
28 + 5	336"	264"	72"
30 + 5	360"	280"	80"
32 + 5	384"	296"	88"
35 + 5	420"	320"	100"
36	432"	288"	144"
40	480"	320"	160"

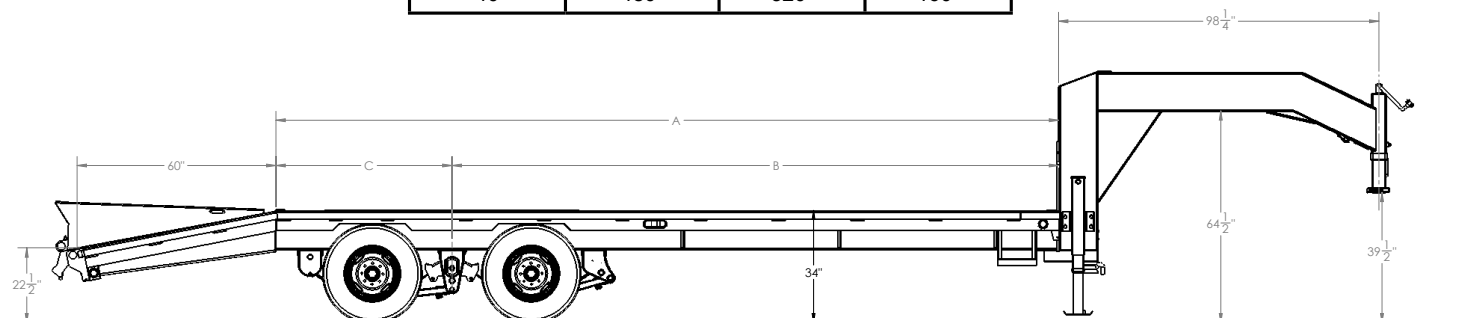



Model	Weight*	Description
22GN-20+5	5,800#	102" x 20' + 5' Tandem Dual Wheel Gooseneck
22GN-25+5	6,300#	102" x 25' + 5' Tandem Dual Wheel Gooseneck
22GN-28+5	6,900#	102" x 28' + 5' Tandem Dual Wheel Gooseneck
22GN-30+5	7,200#	102" x 30' + 5' Tandem Dual Wheel Gooseneck
22GN-32+5	7,500#	102" x 32' + 5' Tandem Dual Wheel Gooseneck
22GN-35+5	7,950#	102" x 35' + 5' Tandem Dual Wheel Gooseneck
22GN-36	7,200#	102" x 36' Tandem Dual Wheel Gooseneck (Straight)
22GN-40	7,800#	102" x 40' Tandem Dual Wheel Gooseneck (Straight)

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
JACKS	Dual 2-Speed Landing Gear
JACKS	Dual Electric Over Hydraulic Jacks
BRAKES	Electric Over Hydraulic Brakes (Drum)
BRAKES	Electric Over Hydraulic Brakes (Disc)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G Dual)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G Dual)
RAMPS	(2) 5' MEGA Ramps
RAMPS	5' Center Pop-Up Dovetail w/ (2) 5' Flip-Over Ramps
RAMPS	(3) 5' Flip-Over Ramps w/Diamond Plate on Bottom
RAMPS	No Dovetail Option (Delete's Dovetail & Ramps)
RAMPS	8' Rear Slide-In Ramps (Straight Deck Only)
BODY	Removable Deck on the Neck- Bolt On (8' W x 6' L)
CARGO CONTROL	Low Profile Tool Box 12" x 18" x 36" (Side Mount)
CARGO CONTROL	Sliding Winch Track (Per 6' Section)
CARGO CONTROL	4" Sliding Winch (Each)
CARGO CONTROL	4" Weld-On Winch (Each)
CARGO CONTROL	4" x 30' Strap (Each)
CARGO CONTROL	B 40 5/8" D-Ring (Each)