

3XPH Super Duty Tandem Dual Pintle


G.V.W.R.	30,000#	Axle	(2) HD 15,000# Dual Wheel w/ Electric Brakes (Oil Bath)
G.A.W.R. (Ea. Axle)	15,000#	Suspension	Heavy Duty 44,000# Adjustable
Coupler	3" ID Pintle Ring	Tire	215/75 R-17.5 Load Range H Dual
Safety Chains	1/2" Grd. 80 w/Safety Latch Hook (2 each)	Wheel	17.5" HC x 6.75", 8x275 MM BC Hub Pilot; Dual Wheel
Jack	Single 12,000# Drop Leg Jack (Bolted On)	Floor	2" Treated Pine or Douglas Fir*
Tongue	W12 x 22" I-Beam	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Top Rail	None	Elec. Plug	7-Way RV
Frame	12" I-Beam, 22# up to 30'; 14" I-Beam on 30' +	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Crossmembers	6" Jr. I-Beam, 16" Centers	FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
Side Rail	8" Channel w/Rub Rail, Tie Down Pockets on 24" Centers, and Chain Spools		

Standard Features

- 3" ID Pintle Ring
- 12,000# Drop Leg Jack- Top Wind (Bolted On)
- 102" Overall Width
- Low Profile Bed, Pierced- Beam Frame
- (2) Side Bed Steps
- 3/8" Heavy Duty Rub Rail
- Tie Down Pockets Along Sides, 24" On Center
- 1-1/4" Pipe Chain Spools Between Tie Down Pockets
- Dexter Brand Axles
- Oil Bath Hubs
- Forward Self Adjusting Brakes
- Heavy Duty 44,000# Adjustable Suspension
- Tongue Tube Standard on 28' (Flat Deck) & Longer
- Cambered Axles
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Modular Sealed Wiring Harness
- 5' Dovetail w/ 5' Double Hinged Spring Assist Flip-Over Ramps
- Complete Break-A-Way System w/Charger
- Radial Tires
- Mudflaps
- Spare Tire & Wheel- Standard Equipped **NEW!**

Description

Dimensions				w/Dovetail	
Length	A	B	C	B	C
20'	240"	180"	60"	186"	54"
25'	300"	216"	84"	232"	56"

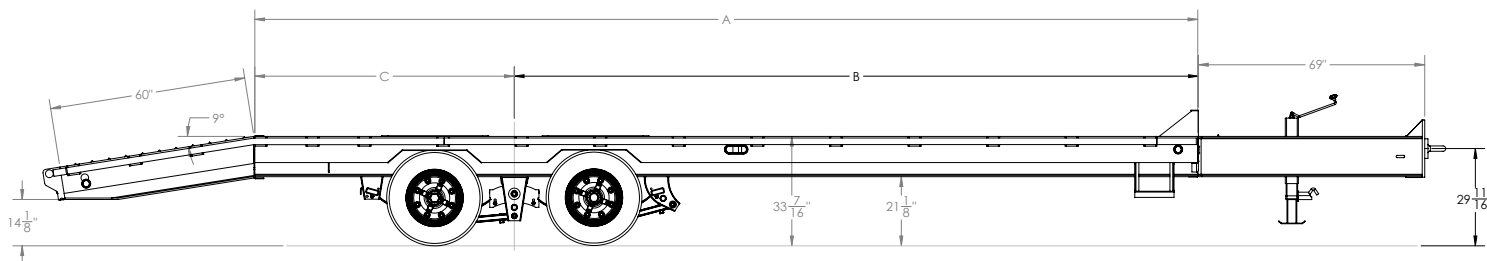

3XPH Super Duty Tandem Dual Pintle



Model	Weight*	Description
3XPH-20+5	7,240#	102" x 20' + 5' Super Duty Tandem Dual Wheel Pintle
3XPH-25+5	7,150#	102" x 25' + 5' Super Duty Tandem Dual Wheel Pintle

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
JACKS	Dual Single-Speed Drop-Leg Jacks
JACKS	Dual 2-Speed Landing Gear
JACKS	Dual Electric Over Hydraulic Jacks
BRAKES	Air Brake Assembly w/ABS on Front, Spring Brake Chambers & Auto Slacks
BRAKES	Electric Over Hydraulic Brakes (Drum)
RAMPS	No Dovetail Option (Delete's Dovetail & Ramps)
CARGO CONTROL	Low Profile Tool Box 15" x 15" x 36" (Side Mount)
CARGO CONTROL	Sliding Winch Track (Per 6' Section)
CARGO CONTROL	4" Sliding Winch (Each)
CARGO CONTROL	4" Weld-On Winch (Each)
CARGO CONTROL	4" x 30' Strap (Each)
CARGO CONTROL	B40 5/8" D-Ring (Each)

*** Trailer is subject to Federal Excise Tax**