


|                            |  |                      |   |
|----------------------------|--|----------------------|---|
| <b>G.V.W.R.</b>            | 58,000#                                    | <b>Axle</b>          | (3) 22,500# Dual Wheel Air Brake - Oil Bath                                       |
| <b>G.A.W.R. (Ea. Axle)</b> | 18,160#                                    | <b>Supension</b>     | 66K Adjustable  |
| <b>Coupler</b>             | 60,000#, 3" ID Pintle Eye                  | <b>Tire</b>          | ST215/75 R-17.5 Load Range H  |
| <b>Safety Chains</b>       | 5/8" Grd. 80 w/Safety Latch Hooks (2 each) | <b>Wheel</b>         | 6.75 x 17.5, 10 Bolt Budd   |
| <b>Jack</b>                | 12K TW Drop Leg Jack                       | <b>Floor</b>         | 2" Nominal Oak (S4S)  |
| <b>Tongue</b>              | Integral w/Frame                           | <b>Lights</b>        | LED D.O.T. Stop, Tail, Turn & Clearance   |
| <b>Top Rail</b>            | None                                       | <b>Elec. Plug</b>    | 7 Way Semi Style  |
| <b>Frame</b>               | 14", 26# I-Beam                            | <b>Finish (Prep)</b> | Steel is Cleaned to Ensure a Professional Smooth Finish.                          |
| <b>Crossmembers</b>        | 6" Jr. I-Beam on 16" Centers               | <b>FINISH</b>        | Superior Quality Finish is Applied for a Highly Decorative and Protective Finish. |
| <b>Side Rails</b>          | 8" Channel                                 |                      |   |

## Standard Features

- 3 Position Pintle Adjustment
- Storage Area in Tongue
- Modular Sealed Wiring Harness w/Junction Box
- Safety Reflective Marker Tape
- 102" Wide
- Low Profile Bed
- Oak Flooring
- 6 - 1" O.D. D-Rings
- Anti-Skid Brake System on Front Axle
- Heavy Duty Oil Bath Axles w/12-1/4" x 7-1/2" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on Three Axles
- 5' Dove Tail w/Double Hinged Spring Assist Ramps
- Grommet Mount Sealed LED Lighting

## Description

| Dimensions |      |      |      |
|------------|------|------|------|
| Length     | A    | B    | C    |
| 24' + 5'   | 348" | 134" | 214" |
| 28' + 5'   | 396" | 158" | 238" |

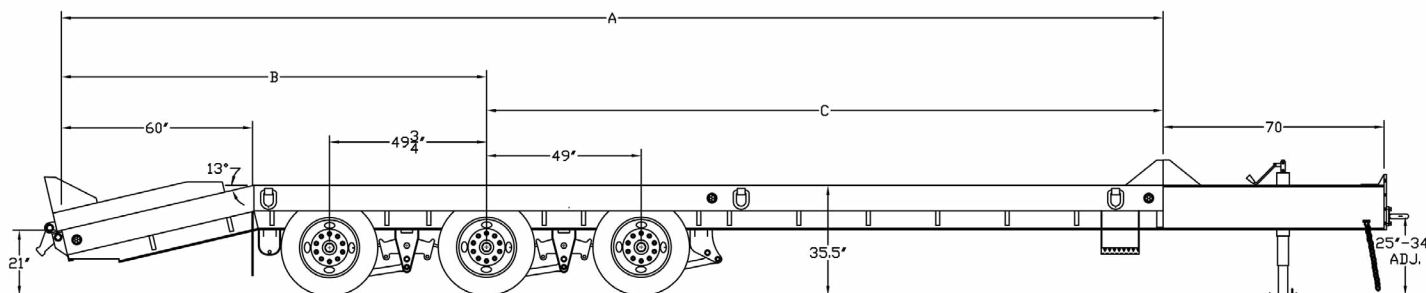

# 5XPH Pintle Heavy Equipment Transport ●



Shown with optional spare tire & wheel and dual 2 speed landing gear

| Model      | Weight* | Description                                |
|------------|---------|--|
| *5XPH-24+5 | 10,350# | 102" x 24' Triple Axle Equipment Transport |
| *5XPH-28+5 | 10,850# | 102" x 28' Triple Axle Equipment Transport |

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

| Category      | Description                              |
|---------------|--|
| JACKS         | Single 2 Speed Drop Leg Jack (25K)       |
| JACKS         | Dual Single Speed Drop Leg Jacks         |
| JACKS         | Dual 2 Speed Landing Gear Jacks (50K)    |
| TIRE/WHEEL    | Spare Tire (ST215/75 R-17.5 LR-H)        |
| TIRE/WHEEL    | Vertical Spare Mount on Tongue           |
| BODY          | Lockable Lid Over Tool Storage in Tongue |
| BODY          | Wood Fill Dovetail & Ramps               |
| CARGO CONTROL | 1" D-Ring (Each)                         |

**\* Trailer is subject to Federal Excise Tax**