

|                            |                                           |                      |                                                                                   |
|----------------------------|-------------------------------------------|----------------------|-----------------------------------------------------------------------------------|
| <b>G.V.W.R.</b>            | 6,000#                                    | <b>Axle</b>          | (2) 3,500# EZ Lube w/ (1) Elec. Brake                                             |
| <b>G.A.W.R. (Ea. Axle)</b> | 3,500#                                    | <b>Supension</b>     | Multi-Leaf Spring w/ Equalizer                                                    |
| <b>Coupler</b>             | 2" A-Frame                                | <b>Tire</b>          | ST205/75R-15 Load Range C                                                         |
| <b>Safety Chains</b>       | 1/4" Grd. 30 w/Safety Latch Hook (2 ea)   | <b>Wheel</b>         | 15" x 5"; White Spoke 5 on 5 Bolt Pattern                                         |
| <b>Jack</b>                | 2,000# Top Wind (Bolted On)               | <b>Floor</b>         | 2" Treated Pine or Douglas Fir*                                                   |
| <b>Tongue</b>              | 4" Channel                                | <b>Lights</b>        | D.O.T. Stop, Tail, Turn & Clearance                                               |
| <b>Top Rail</b>            | None                                      | <b>Elec. Plug</b>    | 7-Way RV                                                                          |
| <b>Frame</b>               | 5" x 3" x 1/4" Angle                      | <b>Finish (Prep)</b> | Steel is Cleaned to Ensure a Professional Smooth Finish.                          |
| <b>Crossmembers</b>        | 3" x 2" x 3/16" Angle                     |                      |                                                                                   |
| <b>Uprights</b>            | None                                      | <b>Finish</b>        | Superior Quality Finish is Applied for a Highly Decorative and Protective Finish. |
| <b>Fenders</b>             | 9" x 72" Rolled Formed w/Back (Bolted On) |                      |                                                                                   |


\* Douglas Fir Available from Caldwell, ID Facility Only

## Standard Features

- Tie Down Pockets on Front & Side
- EZ Lube Hubs
- Dexter Brand Axles
- Nev-R-Adjust Electric Brakes
- Cambered Axles
- Grommet Mount Sealed Lighting
- Protected Wiring
- Removable Sand Foot on Jack
- Complete Break-A-Way System w/Charger
- Removable Fenders
- Radial Tires **NEW!**

## Description

| Dimensions |          |      |         |
|------------|----------|------|---------|
| Length     | A        | B    | C       |
| 14'        | 169-1/2" | 103" | 66-1/2" |
| 16'        | 193-1/2" | 115" | 78-1/2" |

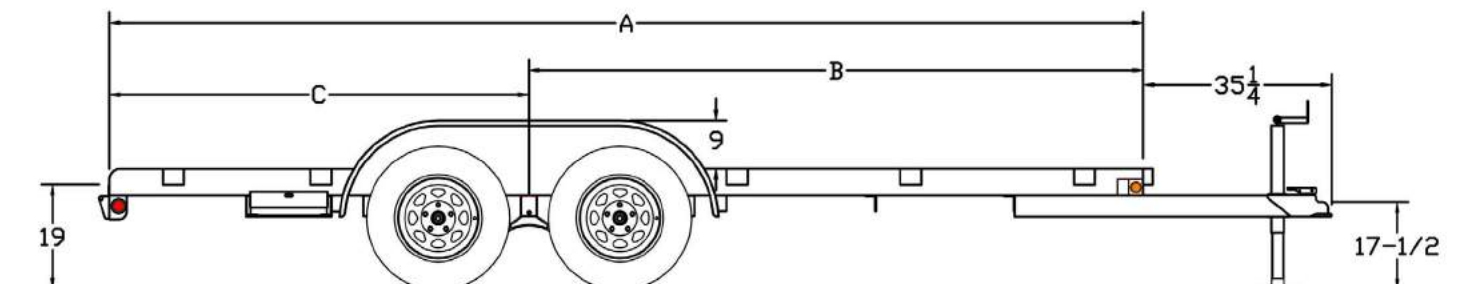

# 60CH Tandem Axle Car Hauler ●



Shown with optional slide-in ramps and spare tire mount

| ◆ Model | Weight* | Description                              |
|---------|---------|------------------------------------------|
| 60CH-14 | 1,430#  | 83" x 14' Economy Tandem Axle Car Hauler |
| 60CH-16 | 1,460#  | 83" x 16' Economy Tandem Axle Car Hauler |

\*Weights shown are for base models without options and are estimates only

## Optional Equipment

| Category   | Description                    |
|------------|--------------------------------|
| COUPLERS   | 2-5/16" Stamped Coupler        |
| BRAKES     | Electric Brakes on 2nd Axle    |
| TIRE/WHEEL | Spare Tire Mount (Side)        |
| TIRE/WHEEL | Spare Tire (ST205/75R-15 LR-C) |
| RAMPS      | 4' Slide-In Angle Ramps        |

**Economy Model- No Additional Options Available**